

Safe and Stable Tire Storage

Efficient use of space at car dealerships and workshops

ssi-schaefer.com

SSI SCHÄFER

Wheel and tire storage

Wheel and rim storage is efficient if it is optimally designed for the local conditions. Space-saving, flexible and safe systems are required. Wheel storage systems from SSI SCHAEFER fulfill precisely these criteria.

Storing wheels and rims has never been easier and more practical. The specially shaped wheel and rim beams simply slot into the pre-assembled upright frames without using screws. In addition, the strong beam end connectors reinforce the rigidity of the shelving. The individual levels can be adjusted in 53 : 53 mm steps at any time.

SSI SCHAEFER offers a variety of wheel storage solutions. These include storage next to each other in single and double-depth racks and in sets behind one another in channels.


Car dealerships and workshops rely increasingly on complete service concepts to offer their customers added value. This includes services such as storing the customers' wheels.

The numerous reference systems speak for themselves. SSI SCHAEFER designs the most economical, technically and ergonomically optimized system based on your specific application and usage.


We are happy to advise you – feel free to contact us!



Dynamic Tire Racks

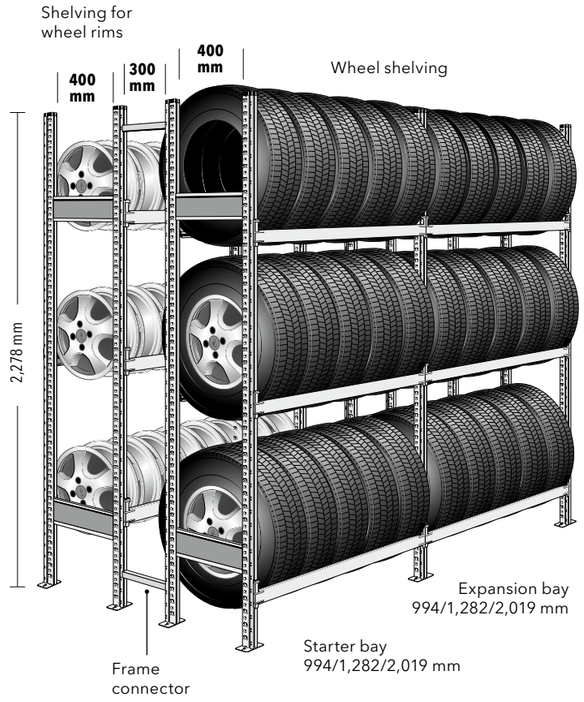

- **Plug-in system for easy and quick installation**
- **Additional storage space** by the use of dividing shelves. The shelves are attached to the upright slots by means of shelf supports.
- **Slotted upright frames**
  Height adjustability pattern:
  Longitudinal beams: 53 : 53 mm
  Shelves: 26.5 : 26.5 mm
- **Careful storage**
  of wheels and tyres due to flat uprights (without lugs) and a specially designed beam profile

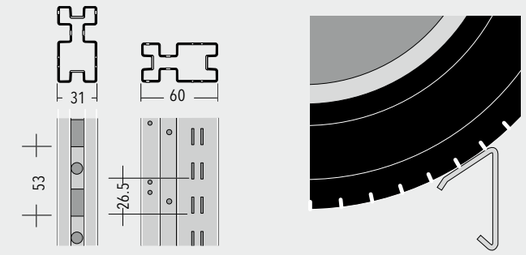

Wheel storage – complete systems / individual parts

Wheel and rim complete shelving systems
For approximately 15 or 18 medium-sized wheels per bay. Especially sturdy and flexible bolt-free system. Sheet steel, galvanized. Complete units consisting of:

Starter bay: 2 frames and 6 beams (equal to 3 storage levels), 4 top caps and 4 floor fixings
Expansion bay: 1 frame and 6 beams (equal to 3 storage levels), 2 top caps and 2 floor fixings
Clear bay width: 994/1,282/2,019 x H 2,278 x D 400 mm
Adjusting pattern: 53 : 53 mm


Item	Type	Bay width (mm)	Order №
RFR34102233V-GF-G	Starter bay	994	6671516
RFR34102233V-AF-G	Expansion bay	1,100	6671517
RFR34132236V-GF-G	Starter bay	1,282	6671518
RFR34132236V-AF-G	Expansion bay	1,282	6671519
RFR34202236V-GF-G	Starter bay	1,506	6671520
RFR34202236V-AF-G	Expansion bay	2,019	6671521

Upright frames, galvanized

Item	Shelf height (mm)	Shelf depth (mm)	Order №
RR34322-V-G-M	2,278	400	6671942
RR34325-V-G-M	2,490	400	6671943
RR34330-V-G-M	2,967	400	6671944

Frame connector
Sheet steel, galvanized. For connecting 2 shelving bays back-to-back. Incl. fixing kit.

Item	For frame distance(mm)	Order №
RV 3300	1	147120

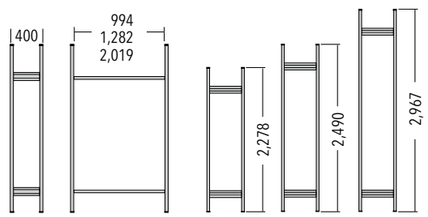



Wheel and rim beams


Item	Clear bay width (mm)	Load/pair max. (kg)	Order №
RTR 31015	994	100	147220
RTR 31115	1,100	100	6670435
RTR 31315	1,282	100	147230
RTR 31325	1,282	200	147980
RTR 31525	1,506	200	147990
RTR 32025	2,019	200	147240
RTR-VS3400	Torsion bar for clear bay	width 2,019 mm	6670339

Shelf supports
For attaching shelves to frames with slotted uprights. 4 shelf supports are required for each shelf.

Item	PU	Order №
EHH-SB	1	6002726


Rim beam


Shelf support


Frame connector



Peetro Aittola
Varastoautomaatit ja varastokalusteet /
Storage solutions & Equipment

+358 44 090 1710
peetro.aittola@ssi-schaefer.com

Tanya Rastamo
Tuotemyynti & Hallinto /
Product sales & Administration

+358 44 720 3747
tanya.rastamo@ssi-schaefer.com

ssi-schaefer.com/fi-fi

© SSI SCHÄFER
Printed in Finland.
We assume no responsibility for printing errors.